SE7120

User Manual

ULTRA

PRO Intercom Display

www.sacelectronics.co.uk

.

1. Slim fit aluminium alloy panel of indoor monitor with simplicity and classic design style.
2. 5.6" color TFT screen with low power consumption, no radiation and high definition.
3. Hands free communication.
4. Monitoring the outside of house.
5. Fourteen polyphonic melodies.
6. Chroma and brightness adjustable.
7. Enclosed 15M cable and one adapter for DIY market.

.

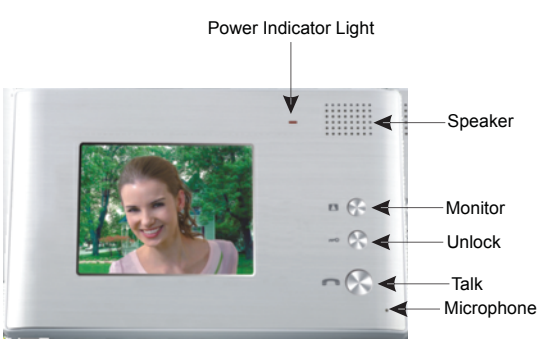

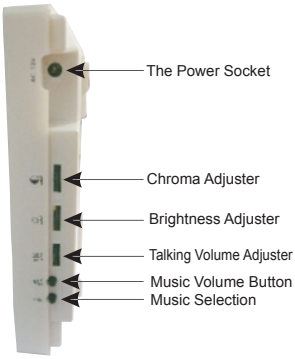

1. Adapter input voltage: AC220V-240V/50Hz
2. Adapter output voltage, output current: AC13.5V 1200mA
3. Talking last time: 120S±10%
4. Monitoring last time: 40S±10%
5. Working distance: 50M(4 x 0.5mm^2)
6. Power consumption: standby＜0. 5W, working＜10W
7. Illumination intensity: 2 luces
8. Visual angle: 92° wide-angle
9. Working temperature: -10°C~40°C
10. Relative humidity: 10-90%(RH)

Parameter	Specifications	Unit
Screen Size	5.6	Inch
Resolution	320 X 3 X 234	Dot

Active Area	113.28【H】X 84.708【V】	mm
Pixel Size	0.118【W】X 0.362【H】	mm
Screen Figure Dimension	126.5.4【W】X 100【H】X 5.7【D】	mm

.

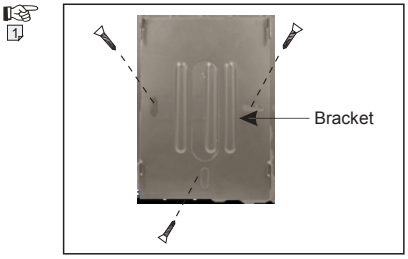

1. Fix the bracket of the video indoor monitor on the wall with screws (Picture 1).
2. Hang the monitor on the bracket after finishing the wire connection. Plug the enclosed adapter into the sockets and connect the monitor (Picture 2).

.

The video door phone kit includes 15 meters wire. If wanting extension to 15-50 meters, please use the 4 0.5mm² wire; If wanting extension to 50-100 meters, please use the 4 0 mm² wire.

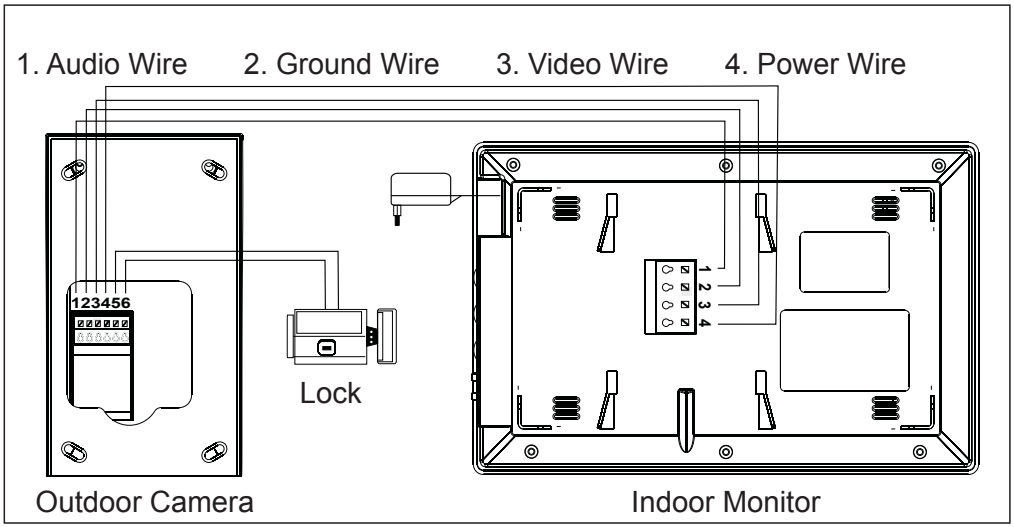

1. The 1,2,3,4 connection terminals of the indoor monitor connect to the 1,2,3,4 connection terminals of the outdoor camera accordingly.
2. The 5,6 connection terminals of the outdoor camera connect to the electronic lock.

.

---

1. Press CALL button of outdoor camera and graceful rings will be heard from indoor monitor and images of visitors will be seen. Then you can talk with them and see them just by pressing TALK button of the indoor monitor. The talking time can last about 120 seconds.
2. Press UNLOCK button to release the door .
3. Pressing MONITOR button can monitor the situation of outdoor, and it can last 40 seconds.
4. Pressing TALK button after pressing MONITOR button can monitor the outdoor situation and talk with the visitors.
5. The brightness, chroma and volume can be adjusted turning by the buttons at the side of monitor.
6. 14 polyphonic melodies for option by pressing the button at the side of monitor.
7. Please take off the protective coating of the screen.

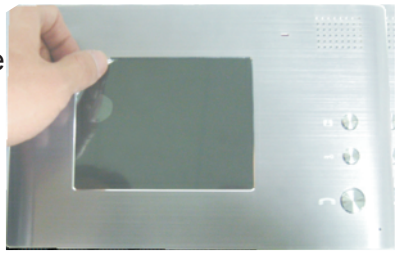

.

---

1. Do not install the indoor monitor at high temperature, high humidity place or near TV.
2. No touching the monitor screen with wet hands.
3. Please use only soft cloth to clean the monitor screen or camera in order to get a clear image.
4. Please avoid throwing or hitting the units.
5. Image could be illegible if the camera is shined by strong light.
6. If you use internal wireless communication systems, image may be fuzzy because of interference from radio waves.